

Note: roof covering & underlayment as req'd by code.

8d box (0.113) nails @ 6" o.c. both sides of panel joint or equivalent. Typical each side of panel.

R-Control Wood Screw, see SIP-135 for spacing requirements.


EPS ridge filler piece.  
R-Control Wood Screw.  
R-Control Do-All-Ply 1/2" diameter continuous bead each side.  
Optional factory electrical chase.

R-Control SIP roof.

SIP Tape or equivalent vapor retarder located interior or exterior per climate conditions or code requirement.

Do-All-Ply continuous along ridge line.

Structural support member with min. bearing width per spline and screw requirements, each side.

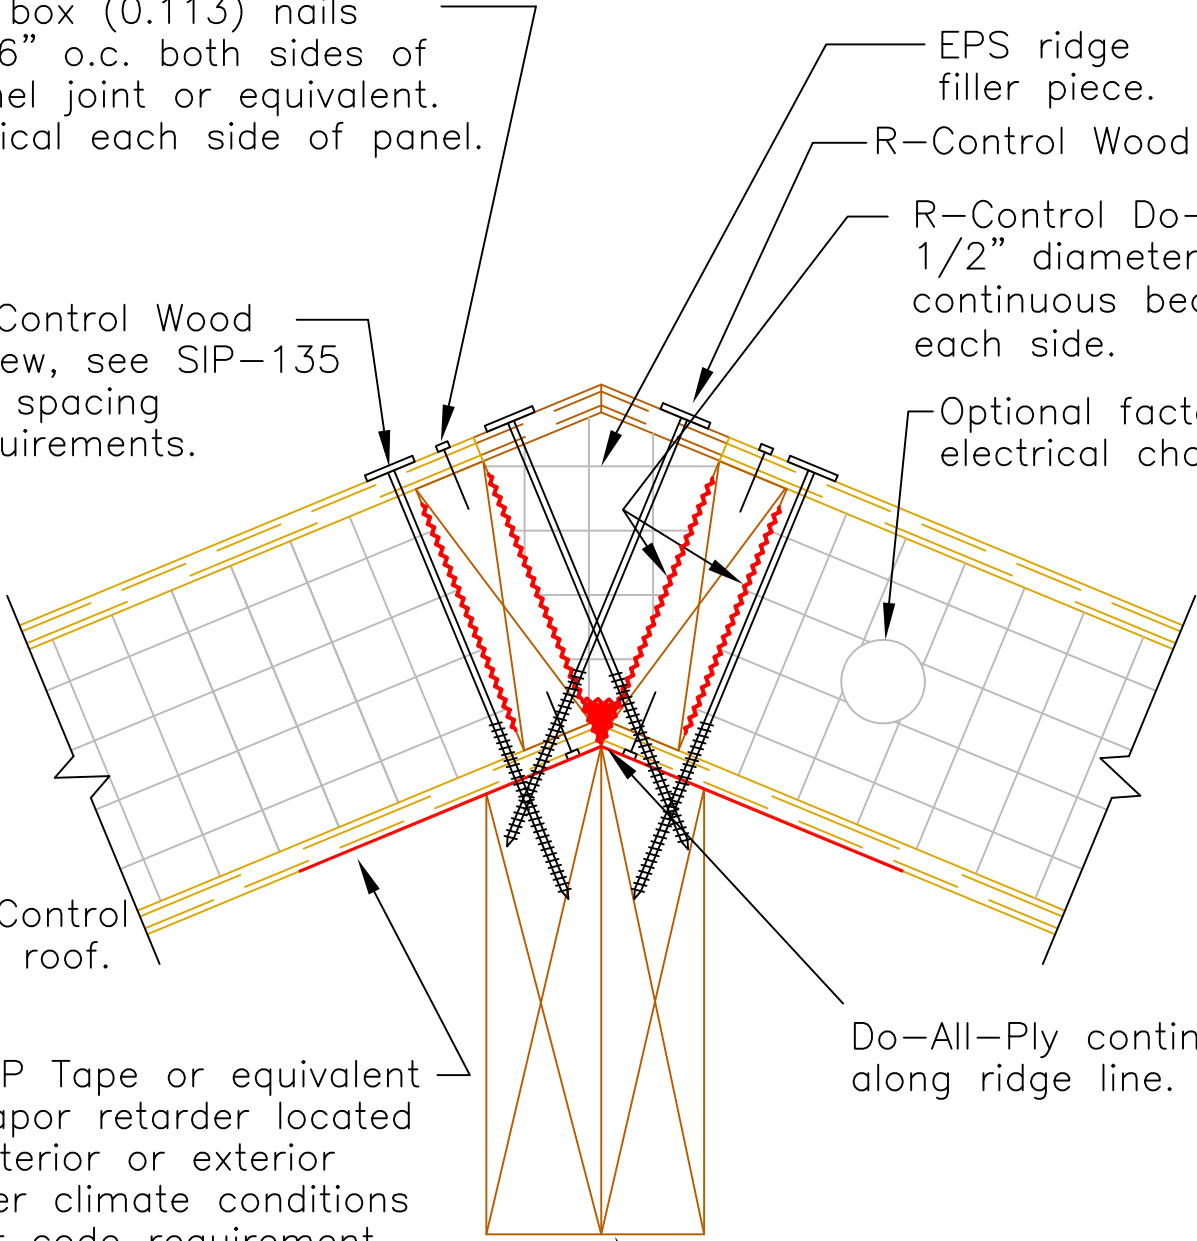

**SECTION**

Scale: NTS

Updated 1-16-12

R-Control® SIP

TITLE: Roof Ridge - Square Cut	NO. SIP-121a
-----------------------------------	-----------------